


A-M

COPPER TUBE CRIMPING LUGS

for extra flexible copper conductors

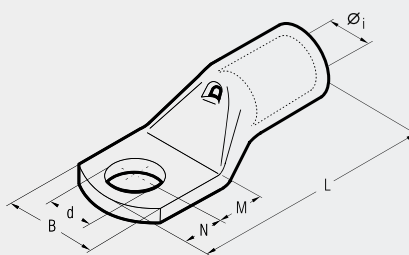

These terminals are particularly recommended for use with extra flexible conductors on for instance, welding machines.

A-M series lugs are designed to suit panel applications.

The dimensions of the tube are designed to obtain the most efficient electrical conductivity and mechanical strength to resist vibration and pull out.

Cembre lugs are annealed to guarantee optimum ductility and electrolytically tin plated to avoid oxidation.

The presence of an inspection hole facilitates full insertion of the conductor.

Conductor Size Extra Flexible sqmm	Ø Stud mm	Ref.	Dimensions mm						Quantity Box/Bag	Mechanical Tools	Hydraulic Tools
			Øi	B	M	N	L	d			
35	6	A 9-M 6/15	9,3	15,0	8,0	7,0	38,5	6,4	400/100	TN 120 SE TN 70 SE B 35-450 B 35-500 HT 45-E HT 51 RH 50 B 51 B 55 HT 81-U RHU 81 HT 120 and tools with 130 kN crimping force ECW-H3D RHU 520	
	8	A 9-M 8	9,3	17,0	9,0	8,0	40,5	8,4	400/100		
	10	A 9-M 10	9,3	18,5	11,0	10,0	44,5	10,5	400/100		
	12	A 9-M 12	9,3	21,0	14,0	12,0	49,5	13,2	300/50		
50	6	A 12-M 6/15	11,0	15,0	8,0	7,0	40,5	6,4	200/50		
	8	A 12-M 8	11,0	19,8	9,0	8,0	42,5	8,4	200/50		
	10	A 12-M 10	11,0	19,8	11,0	10,0	46,5	10,5	200/50		
	12	A 12-M 10/19	11,0	19,0	11,0	10,0	46,5	10,5	200/50		
70	12	A 12-M 12	11,0	22,0	14,0	12,0	51,5	13,2	200/50		
	6	A 17-M 6	13,0	23,0	8,0	7,0	45,0	6,4	200/50		
	8	A 17-M 8	13,0	23,0	9,0	8,0	47,0	8,4	150/50		
	10	A 17-M 10	13,0	23,0	11,0	10,0	51,0	10,5	150/50		
	12	A 17-M 10/19	13,0	19,0	11,0	10,0	51,0	10,5	200/50		
	14	A 17-M 12	13,0	23,0	14,0	12,0	56,0	13,2	150/50		
95	14	A 17-M 14	13,0	25,0	15,5	12,0	57,5	15,0	150/25		
	16	A 17-M 16	13,0	27,0	16,5	13,5	60,0	17,0	150/25		
	8	A 20-M 8	15,0	27,0	9,0	8,0	50,0	8,4	100/25		
	10	A 20-M 10	15,0	27,0	11,0	10,0	54,0	10,5	100/25		
120	12	A 20-M 12	15,0	27,0	14,0	12,0	59,0	13,2	100/25		
	14	A 20-M 14	15,0	27,0	15,5	12,0	60,5	15,0	100/25		
	16	A 20-M 16	15,0	27,0	16,5	13,5	63,0	17,0	100/25		
	8	A 29-M 8	16,5	30,0	9,0	8,0	53,5	8,4	100/25		
	10	A 29-M 10	16,5	30,0	11,0	10,0	57,5	10,5	100/25		
	12	A 29-M 12	16,5	30,0	14,0	12,0	62,5	13,2	100/25		
150	14	A 29-M 14	16,5	30,0	15,5	12,0	64,0	15,0	100/25		
	16	A 29-M 16	16,5	30,0	16,5	13,5	66,5	17,0	100/25		
	20	A 29-M 20	16,5	30,0	22,0	20,0	78,5	21,0	75/25		
	10	A 35-M 10	19,2	34,2	13,0	11,0	65,5	10,5	50/25		
185	12	A 35-M 12	19,2	34,2	16,0	14,0	71,5	13,2	50/25		
	14	A 35-M 14	19,2	34,2	18,0	16,0	75,5	15,0	50/25		
	16	A 35-M 16	19,2	34,2	19,0	17,0	77,5	17,0	50/25		
	20	A 35-M 20	19,2	34,2	22,0	20,0	83,5	21,0	50/25		
185	10	A 40-M 10	21,0	37,5	13,0	11,0	73,0	10,5	50/25		
	12	A 40-M 12	21,0	37,5	16,0	14,0	79,0	13,2	30/15		
	14	A 40-M 14	21,0	37,5	18,0	16,0	83,0	15,0	50/25		
	16	A 40-M 16	21,0	37,5	19,0	17,0	85,0	17,0	30/15		
20	A 40-M 20	21,0	37,5	22,0	20,0	91,0	21,0	50/25			